

Ciemat 686

Sp ISSN 614-087-X

**A NEW TECHNIQUE FOR ULTRAFAST VELOCITY
DISTRIBUTION MEASUREMENTS OF ATOMIC
SPECIES BY POST-IONIZATION LASER
INDUCED FLUORESCENCE (PILIF)**

por:

F. L. Tabares

**CENTRO DE INVESTIGACIONES
ENERGETICAS, MEDIOAMBIENTALES Y TECNOLOGICAS**

MADRID, 1992

CLASIFICACION DOE Y DESCRIPTORES:

700100
TIME-OR-FLICH METHOD
FLUORESCENCE SPECTROSCOPY
MULTI-PHOTON PROCESSES
IONIZATION
SIMULATION
MEASURING METHODS
VELOCITY

Toda correspondencia en relación con este trabajo debe dirigirse al Servicio de Información y Documentación, Centro de Investigaciones Energéticas, Medioambientales y Tecnológicas, Ciudad Universitaria, 28040-MADRID, ESPAÑA.

Las solicitudes de ejemplares deben dirigirse a este mismo Servicio.

Los descriptores se han seleccionado del Thesaurus del DOE para describir las materias que contiene este informe con vistas a su recuperación. La catalogación se ha hecho utilizando el documento DOE/TIC-4602 (Rev. 1) Descriptive Cataloguing On-Line, y la clasificación de acuerdo con el documento DOE/TIC.4584-R7 Subject Categories and Scope publicados por el Office of Scientific and Technical Information del Departamento de Energía de los Estados Unidos.

Se autoriza la reproducción de los resúmenes analíticos que aparecen en esta publicación.

Este trabajo se ha recibido para su impresión en Enero de 1992.

Depósito Legal nº M-2802-1992
ISBN 84-7834-131-5
ISSN 614-087-X
NIPO 238-92-003-3

IMPRIME CIEMAT



1. INTRODUCTION

Velocity distributions, of great relevance in many fields of physics and chemical physics, can be readily measured by Time of Flight (TOF) techniques ¹, provided that free collision conditions exist in the region between the source and the detector. The accuracy of the method is restricted by the finite sharpness of the gating function and the finite dimensions of the detection volume, so that long flight distances are needed for good resolution, in detriment of the signal to noise ratio. On the other hand, Doppler shifted LIF spectroscopy has been widely used for this purpose ¹, although the full scan on the laser wavelength required for the velocity distribution measurement implies a continuous character of the experiment and narrowing the laser bandwidth is made on expenses of pulse energy.

In plasma fusion research, velocity distribution of neutrals are important not only for the evaluation of impurity fluxes but also to determine the mechanism responsible for their ejection ². The continuous character of the flow of sputtered particles and the impossibility to chop it make time of flight (TOF) techniques not applicable to *in situ* velocity measurements in fusion plasma experiments so that Doppler shifted excitation in LIF detection of neutrals is the only method extensively used until now for this purpose³. In general these measurements require many, reproducible, plasma discharges and new methods based on fast scanning of the dye laser frequency during a single discharge have been developed as alternative⁴. In any case velocity resolution has to be gained on expenses of the signal versus noise ratio and correction for the laser power at each wavelength is always needed due to the low saturation parameter required for these experiments.

In the present work a new method for single shot, *in situ* velocity distribution measurements based on REMPI in combination with Laser Induced Fluorescence (LIF), of relevance for impurity flux determinations in fusion plasma research is proposed, altogether with some others applications.

2.1. PILIF EXPERIMENT

The proposed experiment consist on crossing two laser beams (the ionizing and probing ones) in the scattering volume and to record the time evolution of the LIF signal after complete ionization has taken place. After the detection volume has been depleted of neutral atoms by the REMPI process an spatial hole in terms of neutral density is formed. As the sputtered atoms start to fill it, the density in the observation volume will continuously increase and therefore the LIF signal when used as a density diagnostic, i.e. bandwidth greater than the Doppler profile. This last requirement restricts the proposed experiment to those atomic systems where metastable levels do not act as a sink of the laser-populated level, as in 3 level systems.

Assuming a well collimated atomic beam with a given velocity distribution $f(v)$ and a scattering volume with dimension parallel to the travelling direction l the density after a given time after ionization is given by :

$$n(t) = n(0) \times \left[\frac{l}{t} \int_0^{l/t} f(v) v dv + \int_{l/t}^{\infty} f(v) dv \right] \quad (1)$$

where $n(0)$ stands for the density of neutrals before ionization takes place.

The accuracy of the velocity distribution obtained with method will be limited by that of the scattering volume dimensions and its resolution by the dimensions themselves and the minimum sampling interval, ultimately limited by the lifetime of the excited level, providing that ionization takes place in a large extend during the ionizing pulse.

The velocity distribution function, $f(v)$, can be reconstructed from the time evolution of the LIF signal by applying the expression :

$$f(v) = \frac{-1}{n(0)} \times \frac{t^3}{l} \times \frac{\delta^2 n(t)}{\delta^2 t} \quad (2)$$

where v in the case of a point source, far away from the scattering volume, is simply given by l/t .

The most appealing way to carry out the experiment would be by using the same experimental set-up as for LIF detection. This in many instances consists of a dye laser pumped by an excimer one, typically XeCl at 308 nm, so that a 4.03 eV high power photon source is readily available . This photon energy combined with that of the pumping photon is able to bring all the neutral atoms to the ionization continuum in most of the metals typically monitored in limiter experiments. Table 1 shows some of them:

TABLE 1

ATOM	EXCITATION, nm (eV)	IONIZATION (eV)
Fe I	302.0 (4.11)	3.79
Cr I	428.9 (2.92)	3.85
Ti I	293.3 (4.23)	2.61
Be I	234.9 (5.28)	4.04

In order to completely ionize all the atoms in the sampling volume, the right splitting of the excimer power into direct (ionizing) beam and pumping one has to be made. That in principle will depend on the particular atomic system under consideration, but a simple calculation based on the rate equations for a three level system plus ionization⁵ shows that if, for example, a 0.5 J/pulse XeCl laser and a ratio 1:1 between the power used to pump the dye laser and that of the ionizing beam are used, so that a modest 50 μ J/pulse UV radiation is obtained after frequency doubling, still high enough to saturate the resonant transition ($S=150$ for Be, $S=100$ for Fe, focussing in $2 \times 2 \text{ mm}^2$), ionization will take place to a 100% in a time shorter than the laser pulse (15 to 20 nsec), even if the excimer radiation is focussed in an area several times larger, thus minimizing alignment problems. As an example, Fig 1 shows the results for the Fe atom assuming an excimer laser square pulse of 20 nanoseconds and an ionization cross section, for the excited atom, of 10^{-18} cm^2 . The conditions used for the simulation are similar to that used for REMPI detection of Fe atoms in sputtering experiments⁶. As it can be seen a high degree of ionization is expected even at relatively low saturation parameter and modest excimer laser power.

Sampling of the LIF signal in a relevant time scale could be achieved by optically delaying successive reflections of the probing laser or by using a long pulse dye laser (several hundred nanoseconds) and crossing the excimer at the beginning of the pulse, thus obtaining a continuous LIF signal. The first scheme implies long distances (optical delay > pulse duration) and correction for the laser divergence, so that the second scheme will be more feasible. Due to the short time required by the TOF experiment (see below) synchronization of the two lasers should not be critical.

2.2. MODEL CALCULATION FOR EXTENDED SOURCES

The time evolution predicted by Eq. 1 is not directly applicable to extended sources as one has in limiter experiments. Convolution over all the emitter area and the different paths across the sampling volume depending on geometry, as well as attenuation through the plasma edge has to be taken into account.

The results of the calculation for a Be bar limiter, where a 0.6 cm diameter hole is used to look at the scattering volume, a prism of $2 \times 2 \times 4 \text{ mm}$ placed at 1 cm from the limiter in this simulation (see Fig. 2) are displayed in Fig. 3. Plasma edge temperature and density profiles as well as ionization and excitation rate constants are the same as in Ref 7. No contribution to the refilling of the hole due to CX or electron recombination is considered as they are expected to be not fast enough to effectively compete with the direct flux of sputtered atoms in the relevant time scale. A cosine distribution for sputtered particles is assumed.

As it can be seen in Fig 3a, discrimination between sputtering (Thompson model) and thermal distributions should be obvious even in a short time after the ionizing pulse ($t=0$). It must be recalled at this point that accurately measuring the Doppler profile for a thermal distribution requires an extremely narrow laser bandwidth, not always available. A higher resolution in this case, by PILIF will be

easily achieved by simply enlarging l . A factor of two in the binding energy will be also distinguishable after several tens of nanosecond. Fig 3b shows the velocity distributions for these two cases ($E_b = 3.32$ eV and 1.66 eV respectively) as they would be measured by Doppler shift in the same geometry and plasma edge conditions.

3. EXPERIMENTAL SET-UP

The available experimental set-up, where the proposed experiment will be undertaken, has been previously described⁸. Basically, a DC Glow Discharge in an inert gas (He, Ar) is produced, the stainless steel chamber acting as the cathode ($\approx 17\%$ Cr). The sputtered Cr atoms are detected by LIF at 429 nm (two level system) by using an excimer pumped (XeCl) dye laser (Lambda Physik LPX 205i-ibid. FL 3002E). The available bandwidth can be reduced from 0.2 to 0.04 cm^{-1} by an intracavity etalon, so that a velocity resolution of ≈ 0.5 Km/s can be obtained for the standard Doppler shifted LIF experiment (see fig. 3b), providing that saturation of the transition is avoided ($S = 0.6 \text{ kW/cm}^2 \text{ s}^{-1}$). Splitting of the excimer radiation at 308 nm will still allow 200 mJ/pulse for the ionizing beam and > 20 mJ/pulse for pumping of the transition, so that the required conditions for the REMPI-LIF experiment can be easily fulfilled, even without focussing of either laser beam. A flashlamp-pumped dye laser (1 J/pulse, pulse duration $\approx 1 \mu\text{s}$, bandwidth ≈ 1 nm), presently under construction, will be used for "long time" excitation under saturation conditions. The LIF time evolution will be recorded in a fast digital oscilloscope (Tektronix DSA 601, 1 GS/s) and the data transferred to a PC. Synchronization of the excimer and the dye laser beams will be achieved by optically delaying part of the 429 nm radiation used to trigger the excimer laser via a fast photodiode.

4. OTHER EXPERIMENTS

The good spatial and temporal resolution of laser diagnostics could be used in the REMPI experiments to probe the plasma edge. Although no detailed calculations have been performed yet, the screening properties of the plasma edge could, in principle, be tested without perturbing other plasma parameters in combination with neutral atomic beam diagnostics. Besides, REMPI could be used to create a highly located, time resolved high intensity pulse of single charged ions which propagation through the plasma, followed by optical methods, could yield information concerning particle transport, among others.

In atomic beams experiments, the proposed ionization scheme could be used to optically chop the beam with an extremely narrow equivalent gate function, thus improving the velocity resolution in the conventional TOF experiment.

ACKNOWLEDGEMENTS

The author would like to thank Dr.J. Hackmann, Dr. C. Niesband and Dr. M. Bessenrodt-Weberpals for the very useful discussion and suggestions about the proposed experiments during the author's stay at the Düsseldorf University and to the TJ-I team.

FIGURE CAPTIONS:

Fig. 1 : Calculated ionization yield of Fe atoms as a function of probe and ionizing laser powers at the end of a 20 nanoseconds pulse . $U_{\text{Saturation}} = 70 \text{ KWats/cm}^2 \times \text{nm}$.

Fig. 2 : Geometry assumed in the model calculation for a Be limiter . The interaction with the plasma is assumed to take place within a rectangle of 2 cm wide and 4 cm high. See text for the rest of the parameters used.

Fig. 3 : Results from the model calculation :

a) : Time evolution of the LIF signal. Thompson model for $E_b(\text{Be}) = 3.32 \text{ eV}$ (top) and $E_b = 1.66$ (middle) and thermal distribution (bottom) for $T = 2000 \text{ K}$.

b) : Velocity distribution along the detection line of sight for the $E_b = 3.32$ and $E_b = 1.66 \text{ eV}$ cases for the same geometry as above .

REFERENCES

1. Atomic and Molecular Beam Methods Vol 1 . G. Scoles , Oxford University Press, Oxford (1988)
2. P. C Stangeby and C. Farrell, Plasma Pysics and Controlled Fusion, **32** (1990) 677
3. A.Elbern, E, Hintz and B. Schweer, J. Nucl. Mat. 76&77,(1978),143
4. M. Maeda *et al.* ,J. Nucl. Mat. 111&112, (1982)
5. Laser Analytical Spectrometry. V. S. Letokhov ed., Adam Hilger, Bristol (1986)
6. M.J. Pellin *et al.* Nucl. Instr. and Meth. B18 (1987) 446
7. M. Bessenrodt-Weberpals *et al* ,Proceedings of the 14th European Conference on Controlled Fusion and Plasma Physics,Madrid ,1987,p.710. Also ,*ibid* 8th Int. Conf. on Plasma Surface Interactions, Jülich,1988
8. F.L. Tabares, E. de la Cal and D. Tafalla. Report EUR-CIEMAT 91/25. (1990)

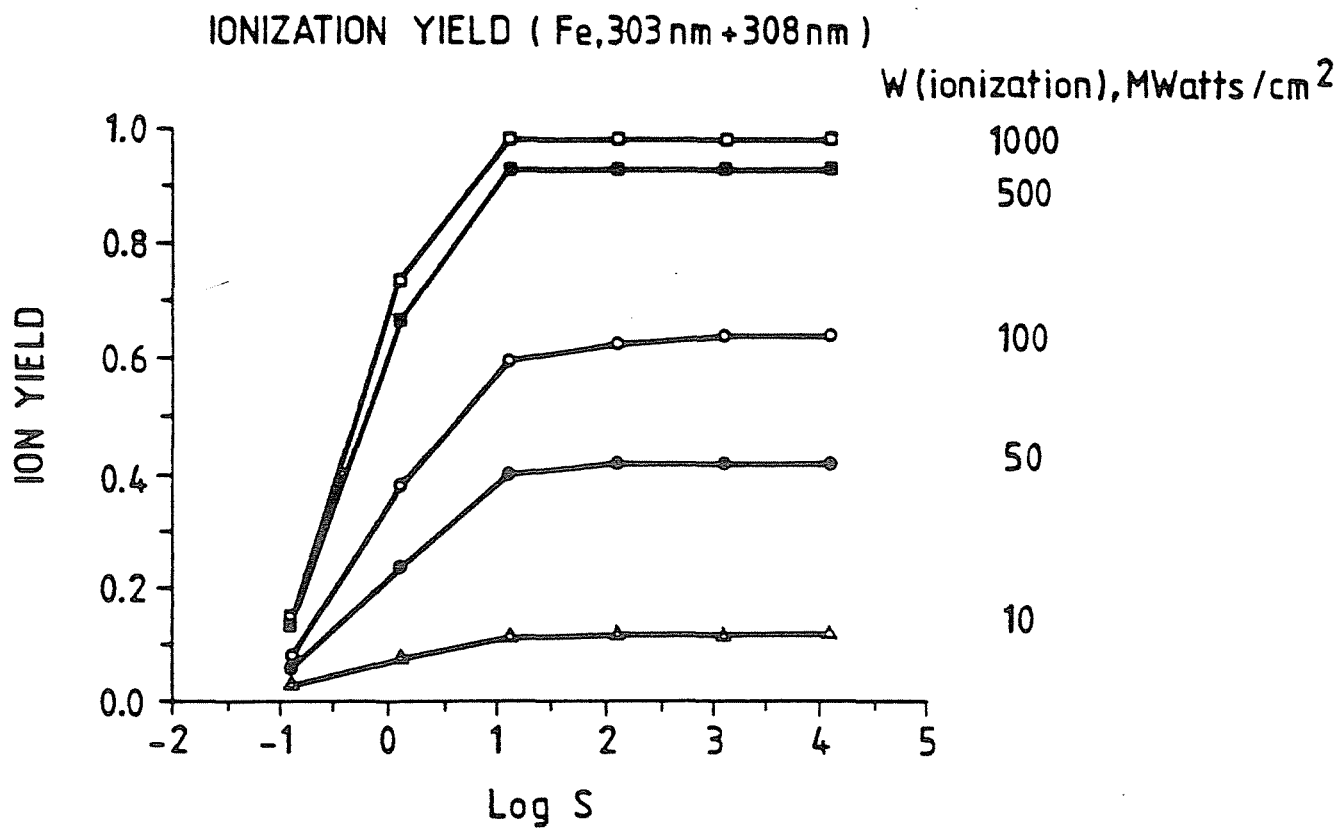


Fig. 1


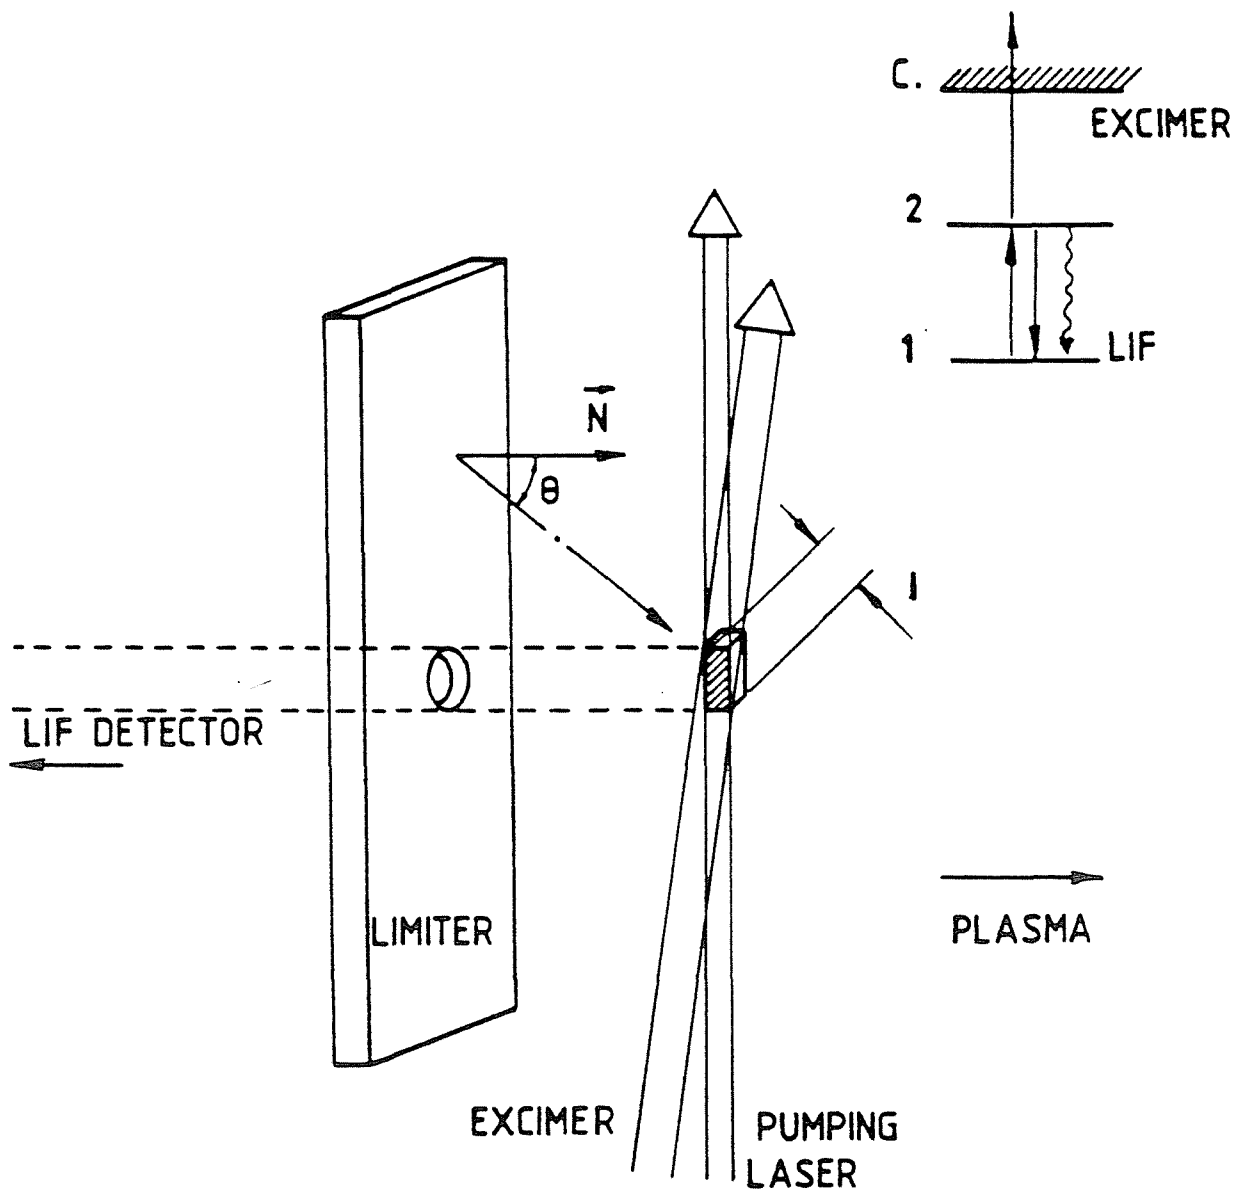


Fig. 2

a)

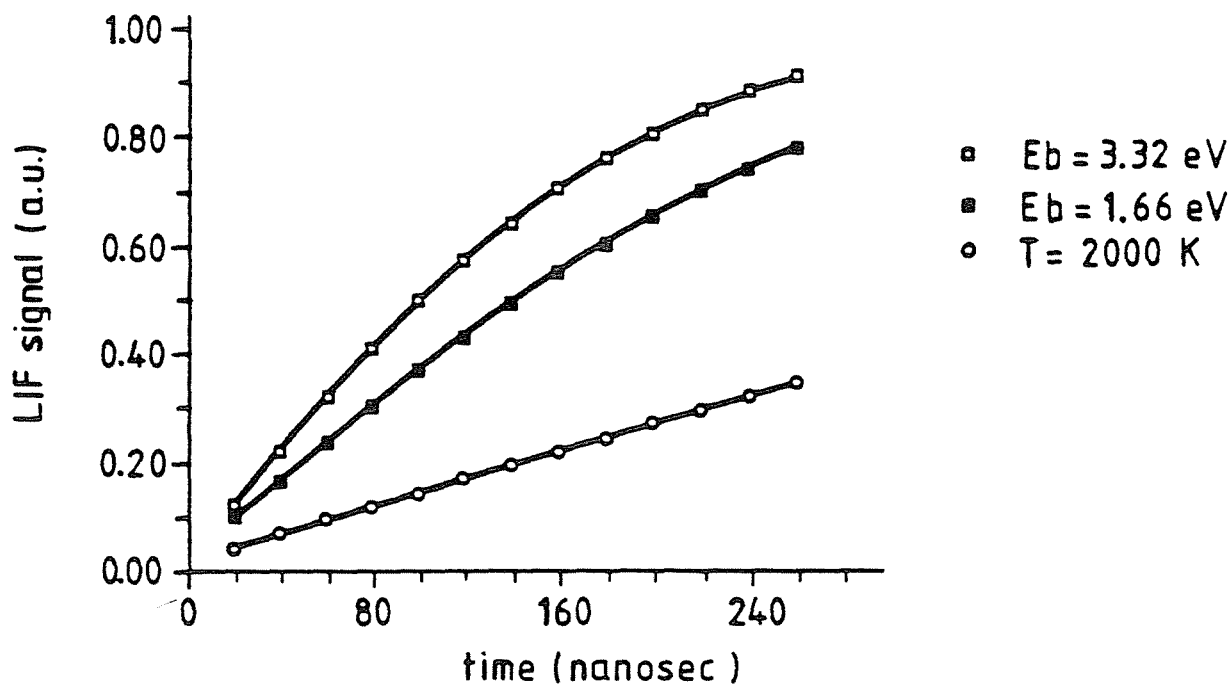

b)

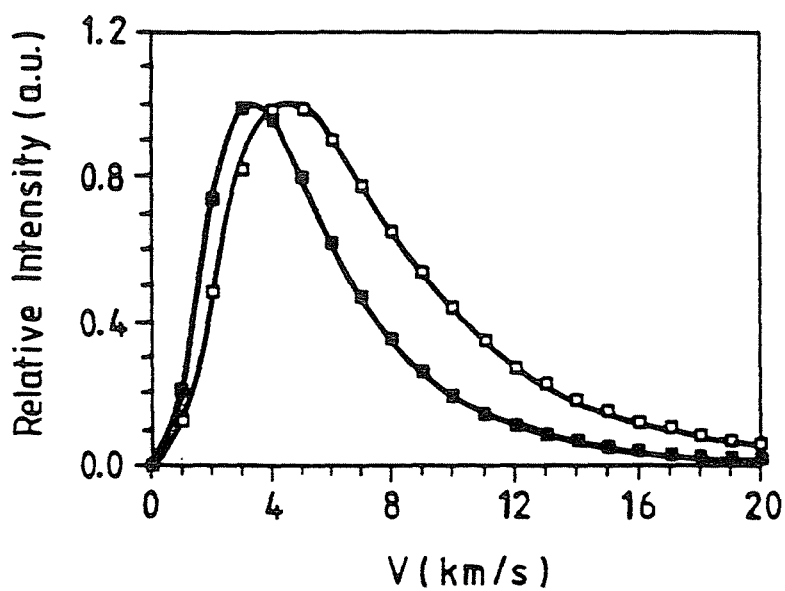


Fig. 3

CIEMAT-686

Centro de Investigaciones Energéticas, Medioambientales y Tecnológicas.
Instituto de Investigación Básica.- Madrid.

"Nueva técnica para la determinación ultrarápida de distribución de velocidades de especies atómicas por fluorescencia inducida por laser en la post-ionización".

TABARES, F.L. (1992) 10 pp.;3 figs.;8 refs.

Se presenta un nuevo método para la medida de distribución de velocidades de impurezas metálicas, de relevancia en estudios que impliquen fuentes continuas tales como los experimentos de interacción plasma-limitador en plasmas de fusión o experimentos de sputtering, basada en la combinación de las técnicas de ionización Multifotónica Resonante y de Fluorescencia Inducida por Láser. De acuerdo con las simulaciones hechas para diversas especies atómicas cabe esperar un alto grado de ionización de las especies atómicas en estudio y una alta resolución temporal en la medida de su distribución de velocidades. También se proponen otras posibles aplicaciones del proceso de ionización Multifotónica Resonante a estudios en el borde de

CIEMAT-686

Centro de Investigaciones Energéticas, Medioambientales y Tecnológicas.
Instituto de Investigación Básica.- Madrid.

"Nueva técnica para la determinación ultrarápida de distribución de velocidades de especies atómicas por fluorescencia inducida por laser en la post-ionización".

TABARES, F.L. (1992) 10 pp.;3 figs.;8 refs.

Se presenta un nuevo método para la medida de distribución de velocidades de impurezas metálicas, de relevancia en estudios que impliquen fuentes continuas tales como los experimentos de interacción plasma-limitador en plasmas de fusión o experimentos de sputtering, basada en la combinación de las técnicas de ionización Multifotónica Resonante y de Fluorescencia Inducida por Láser. De acuerdo con las simulaciones hechas para diversas especies atómicas cabe esperar un alto grado de ionización de las especies atómicas en estudio y una alta resolución temporal en la medida de su distribución de velocidades. También se proponen otras posibles aplicaciones del proceso de ionización Multifotónica Resonante a estudios en el borde de

CIEMAT-686

Centro de Investigaciones Energéticas, Medioambientales y Tecnológicas.
Instituto de Investigación Básica.- Madrid.

"Nueva técnica para la determinación ultrarápida de distribución de velocidades de especies atómicas por fluorescencia inducida por laser en la post-ionización".

TABARES, F.L. (1992) 10 pp.;3 figs.;8 refs.

Se presenta un nuevo método para la medida de distribución de velocidades de impurezas metálicas, de relevancia en estudios que impliquen fuentes continuas tales como los experimentos de interacción plasma-limitador en plasmas de fusión o experimentos de sputtering, basada en la combinación de las técnicas de ionización Multifotónica Resonante y de Fluorescencia Inducida por Láser. De acuerdo con las simulaciones hechas para diversas especies atómicas cabe esperar un alto grado de ionización de las especies atómicas en estudio y una alta resolución temporal en la medida de su distribución de velocidades. También se proponen otras posibles aplicaciones del proceso de ionización Multifotónica Resonante a estudios en el borde de

CIEMAT-686

Centro de Investigaciones Energéticas, Medioambientales y Tecnológicas.
Instituto de Investigación Básica.- Madrid.

"Nueva técnica para la determinación ultrarápida de distribución de velocidades de especies atómicas por fluorescencia inducida por laser en la post-ionización".

TABARES, F.L. (1992) 10 pp.;3 figs.;8 refs.

Se presenta un nuevo método para la medida de distribución de velocidades de impurezas metálicas, de relevancia en estudios que impliquen fuentes continuas tales como los experimentos de interacción plasma-limitador en plasmas de fusión o experimentos de sputtering, basada en la combinación de las técnicas de ionización Multifotónica Resonante y de Fluorescencia Inducida por Láser. De acuerdo con las simulaciones hechas para diversas especies atómicas cabe esperar un alto grado de ionización de las especies atómicas en estudio y una alta resolución temporal en la medida de su distribución de velocidades. También se proponen otras posibles aplicaciones del proceso de ionización Multifotónica Resonante a estudios en el borde de

los plasmas de fusión y a la mejora de técnicas más convencionales para la medida de distribución de velocidades.

CLASIFICACION DOE Y DESCRIPTORES: 700100. Time-of-fligh Method. Fluorescence Spectroscopy. Multi-photon Processes. Ionization. Simulation. Measuring Methods. Velocity.

los plasmas de fusión y a la mejora de técnicas más convencionales para la medida de distribución de velocidades.

CLASIFICACION DOE Y DESCRIPTORES: 700100. Time-of-fligh Method. Fluorescence Spectroscopy. Multi-photon Processes. Ionization. Simulation. Measuring Methods. Velocity.

los plasmas de fusión y a la mejora de técnicas más convencionales para la medida de distribución de velocidades.

CLASIFICACION DOE Y DESCRIPTORES: 700100. Time-of-fligh Method. Fluorescence Spectroscopy. Multi-photon Processes. Ionization. Simulation. Measuring Methods. Velocity.

los plasmas de fusión y a la mejora de técnicas más convencionales para la medida de distribución de velocidades.

CLASIFICACION DOE Y DESCRIPTORES: 700100. Time-of-fligh Method. Fluorescence Spectroscopy. Multi-photon Processes. Ionization. Simulation. Measuring Methods. Velocity.

CIEMAT-686

Centro de Investigaciones Energéticas, Medioambientales y Tecnológicas.
Instituto de Investigación Básica.- Madrid.

"A new technique for ultrafast velocity distribution measurements of atomic species by post-ionization laser induced fluorescente (PILIF)".

TABARES, F.L. (1992) 10 pp.;3 figs.;8 refs.

A new method for single shot velocity distribution measurement of metallic impurities of relevance for studies involving continuous sources, such as limiter experiments in fusion devices or sputtering experiments, based in the combination of Resonant Enhanced Multiphoton Ionization (REMPI) and Laser Induced Fluorescence (LIF) is proposed. High ionization yield and good time resolution are expected according to the numerical simulation of the experiment that has been run for several atomic species. Other possible applications of REMPI to plasma edge physics and to conventional techniques for velocity distribution measurements are briefly addressed.

CIEMAT-686

Centro de Investigaciones Energéticas, Medioambientales y Tecnológicas.
Instituto de Investigación Básica.- Madrid.

"A new technique for ultrafast velocity distribution measurements of atomic species by post-ionization laser induced fluorescente (PILIF)".

TABARES, F.L. (1992) 10 pp.;3 figs.;8 refs.

A new method for single shot velocity distribution measurement of metallic impurities of relevance for studies involving continuous sources, such as limiter experiments in fusion devices or sputtering experiments, based in the combination of Resonant Enhanced Multiphoton Ionization (REMPI) and Laser Induced Fluorescence (LIF) is proposed. High ionization yield and good time resolution are expected according to the numerical simulation of the experiment that has been run for several atomic species. Other possible applications of REMPI to plasma edge physics and to conventional techniques for velocity distribution measurements are briefly addressed.

CIEMAT-686

Centro de Investigaciones Energéticas, Medioambientales y Tecnológicas.
Instituto de Investigación Básica.- Madrid.

"A new technique for ultrafast velocity distribution measurements of atomic species by post-ionization laser induced fluorescente (PILIF)".

TABARES, F.L. (1992) 10 pp.;3 figs.;8 refs.

A new method for single shot velocity distribution measurement of metallic impurities of relevance for studies involving continuous sources, such as limiter experiments in fusion devices or sputtering experiments, based in the combination of Resonant Enhanced Multiphoton Ionization (REMPI) and Laser Induced Fluorescence (LIF) is proposed. High ionization yield and good time resolution are expected according to the numerical simulation of the experiment that has been run for several atomic species. Other possible applications of REMPI to plasma edge physics and to conventional techniques for velocity distribution measurements are briefly addressed.

CIEMAT-686

Centro de Investigaciones Energéticas, Medioambientales y Tecnológicas.
Instituto de Investigación Básica.- Madrid.

"A new technique for ultrafast velocity distribution measurements of atomic species by post-ionization laser induced fluorescente (PILIF)".

TABARES, F.L. (1992) 10 pp.;3 figs.;8 refs.

A new method for single shot velocity distribution measurement of metallic impurities of relevance for studies involving continuous sources, such as limiter experiments in fusion devices or sputtering experiments, based in the combination of Resonant Enhanced Multiphoton Ionization (REMPI) and Laser Induced Fluorescence (LIF) is proposed. High ionization yield and good time resolution are expected according to the numerical simulation of the experiment that has been run for several atomic species. Other possible applications of REMPI to plasma edge physics and to conventional techniques for velocity distribution measurements are briefly addressed.

DOE CLASSIFICATION AND DESCRIPTORS: 700100. Time-of-flight Method. Fluorescence Spectroscopy. Multi-photon Processes. Ionization. Simulation. Measuring Methods. Velocity.

DOE CLASSIFICATION AND DESCRIPTORS: 700100. Time-of-flight Method. Fluorescence Spectroscopy. Multi-photon Processes. Ionization. Simulation. Measuring Methods. Velocity.

DOE CLASSIFICATION AND DESCRIPTORS: 700100. Time-of-flight Method. Fluorescence Spectroscopy. Multi-photon Processes. Ionization. Simulation. Measuring Methods. Velocity.

DOE CLASSIFICATION AND DESCRIPTORS: 700100. Time-of-flight Method. Fluorescence Spectroscopy. Multi-photon Processes. Ionization. Simulation. Measuring Methods. Velocity.